


フローティングナット(ケージナット)

FLOATING NUTS (CAGE NUTS)







BF(SS)



- 特 徴** ● 多少の中心ズレでもネジが締付けられます。
Feature ● Screw can be tightened even slightly off-center.
- 材 質** ● 鉄 (SPCC)
表面処理 ● 三価クロメート
- Material** ● Cold rolled steel plate (SPCC)
Finish ● Trivalent chromate plating

品 番 Product No.	W ₁	W ₂	(H ₁)	(H ₂)	(H ₃)	t	M	自重(g) Weight	入 数 Lot	単 価 Price
BF-30	13	9.6	10	6	4.5	0.5	5	4.5		¥22
BF-40	13	9.6	10	6	4.5	0.5	6	4.4		¥22
BF-50	(16.5)	12	13	7	5	0.6	5	9.2		¥200
BF-60	(16.5)	12	13	7	5	0.6	6	9		¥200
BF-80	(16.5)	12	13	8	5	0.6	8	9		¥200

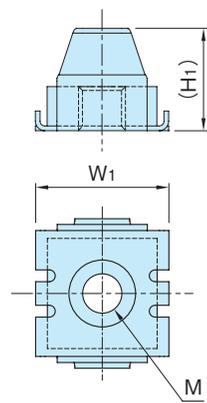

取付穴
適用板厚 t1.6~t2.6



使用例
ナットが範囲内で自由に動くので
多少の中心ズレでもボルトの締め込みが出来ます。

溶接ナット パイロット付

WELD NUTS WITH PILOT



BW(SS)



- 材 質** ● 鉄 (SS)
表面処理 ● 生地
用 途 ● タップを立てられない物に対して溶接して使用します。
備 考 ● パイロット無し等もございますので、担当者にて確認して下さい。
 ● ステンもあります。
- Material** ● Rolled steel (SS)
Finish ● Plain
Specific Use ● Can be welded and used for things can not tap.
Remarks ● Weld nuts without pilot are also available. Please consult us.

ボス/ビス
ナット
アイボルト

品 番 Product No.	d ねじの呼び Nominal screw size	外 形 Outline dimension				面取り Chamfering		パイロット Pilot				製品自重(g) Weight	単 価 Price
		S		H		D	g	D1		t			
		基準寸法 Standard dimension	許容差 Tolerance	基準寸法 Standard dimension	許容差 Tolerance	(約) Approx	(最大) Max	基準寸法 Standard dimension	許容差 Tolerance	基準寸法 Standard dimension	許容差 Tolerance		
BW-4	M4 (11x5)	11		5	0	7	0.5	7		0.8		2.8	¥10
BW-5	M5 (11x5)		0		-0.3							3	¥10
BW-6	M6 (13x6)	13	-0.43	6		9		9	-0.1			5	¥10
BW-8	M8 (15x7.5)	15		7.5	0	11		11	-0.3			8	¥12
BW-10	M10 (17x9)	17		9	-0.36	13	0.8	13				11	¥20
BW-12	M12 (19x11)	19	0	11	-0.43	15		15		1.2	0	15.4	¥25